

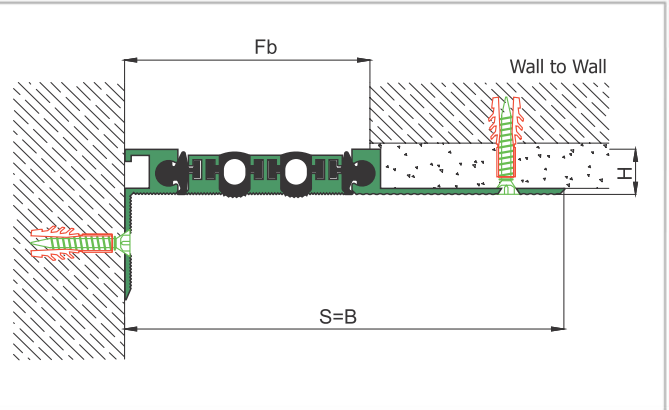


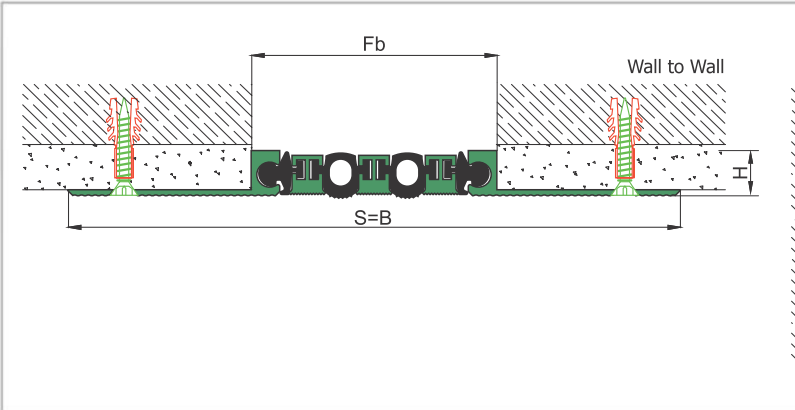

AS U136 can be considered as surface mounted type of AS A126 and can easily be installed by means of screws to all types of wall & ceiling. Adjustable interlocking profile and gasket configuration makes it available for gaps up to 200 mm. Multipartite design ensures the profile to meet displacements in 3 directions. If inquired, AS U136 can be applied with floor type AS U236 and this dual application brings in a decorative aspect. Profiles are delivered factory-assembled.

- Application Areas** : Indoor & Outdoor / Wall & Ceiling
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane


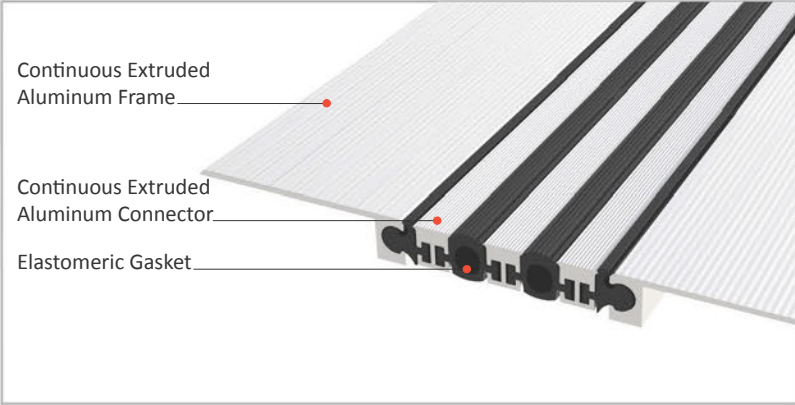


* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS **BLACK** GREY BEIGE Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS U136-035	35	15	155	155	± 2	N/A	3
	AS U136-060	60	15	180	180	± 4	N/A	3
	AS U136-080	80	15	200	200	± 6	N/A	3
	AS U136-100	100	15	220	220	± 8	N/A	3
	AS U136-120	120	15	240	240	± 10	N/A	3
	AS U136-140	140	15	260	260	± 12	N/A	3
	AS U136-160	160	15	280	280	± 14	N/A	3
	AS U136-180	180	15	300	300	± 16	N/A	3
	AS U136-200	200	15	320	320	± 18	N/A	3

Note: Please ask for different sizes

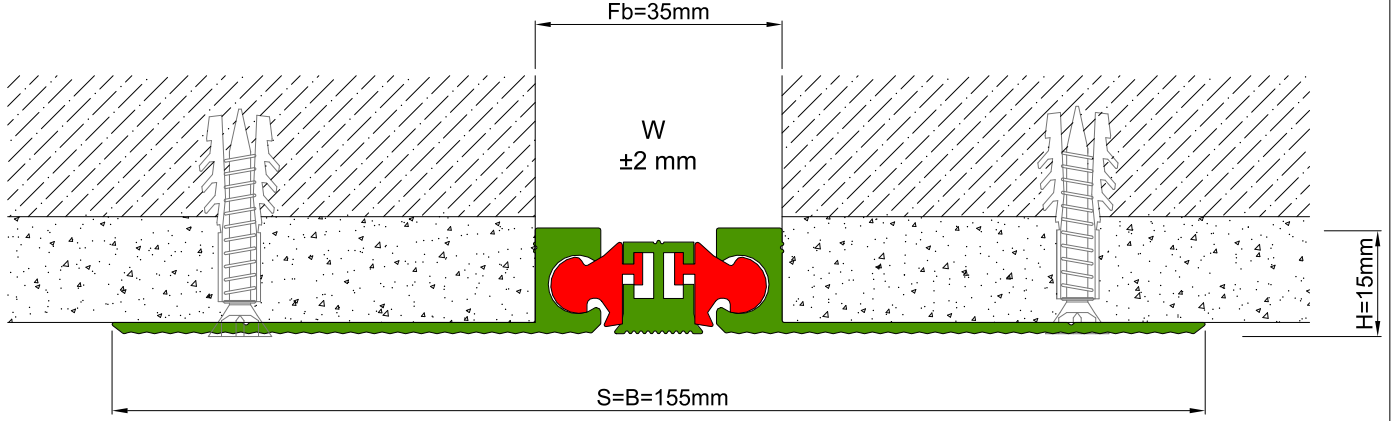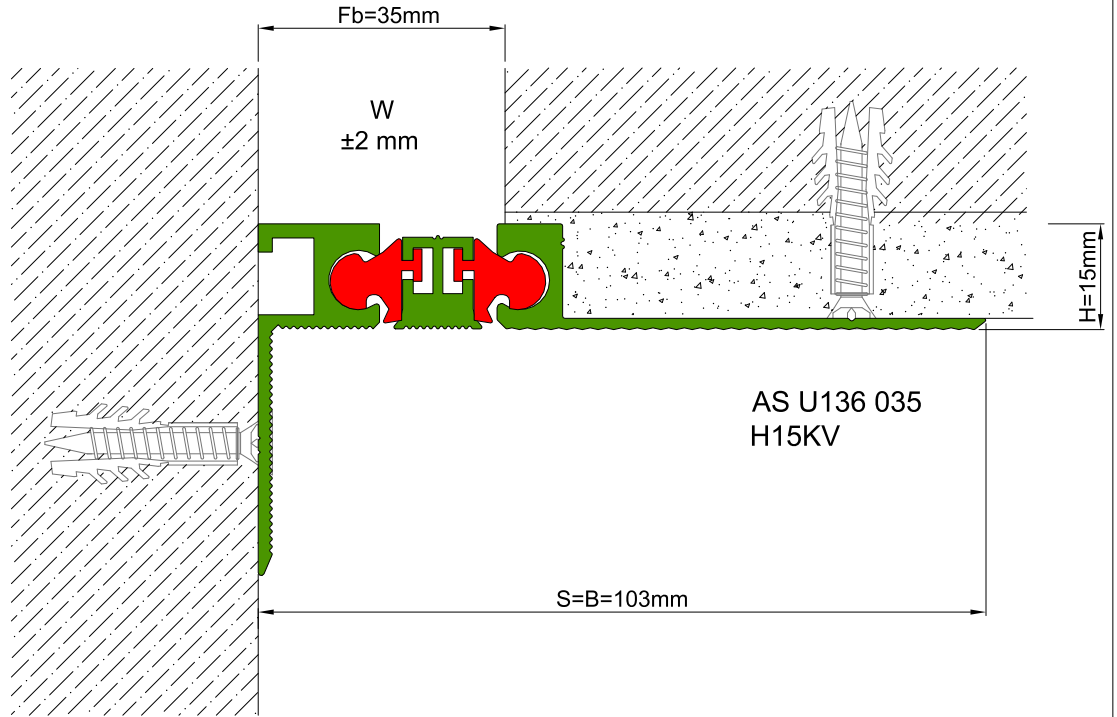
 AS U136 035
 H15V

 AS U136 035
 H15KV

Profil No Profile Number	AS U136 035	AS U136 035K
Fb (mm)	35	35
H (mm) yaklaşık approx.	15	15
W± (mm) yaklaşık approx.	±2	±2
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminium: Natural, Inserts: Black, grey, others	
Malzeme Material	Alüminyum, Termoplastik Kauçuk (gri ve diğer) Aluminium, Thermoplastic Rubber (grey and others)	
Standart Uzunluk (m) Standart Length (m)	3	