

AS U145 surface mounted profile can easily be installed by means of screws to all types of wall & ceiling. Push-down elastomeric gasket can be changed without demounting the profile. Profiles up to 80 mm gap are manufactured with single gasket while the wider ones are with double gaskets joined with a connector profile. For some gaps, profile can be applied with floor type AS U245 as a dual application chamfered edges and pin striped covers give the profile a decorative aspect.

Application Areas : Indoor / Wall & Ceiling

Ideal for : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc


Material : Mill Finish Aluminum (Anodizing optional), TPE Gasket

Aluminum Alloy : 6063 AA-USA / EN AW 6063

: Fire Barrier, Waterproof EPDM membrane **Optional Supplies**





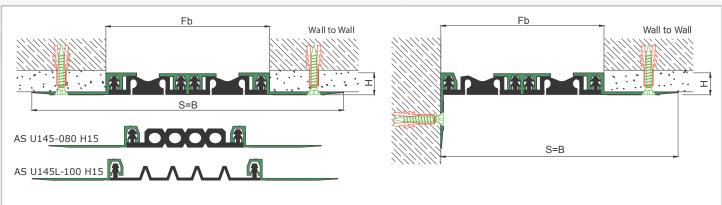

^{*} Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLO	RS BL/	ACK	GREY		BEIGE	Custom C	Colors available.	
LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH	VISIBLE WIDTH	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH


LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS U145-030	30	15	127	127	± 5	N/A	3
	AS U145-050	50	15	147	147	± 7	N/A	3
	AS U145-080	80	15	177	177	± 10	N/A	3
	AS U145-100	105	15	189	189	± 14	N/A	3
	AS U145 L-050	50	15	147	147	+16 / -8	N/A	3
	AS U145 L-080	80	15	177	177	± 20	N/A	3
	AS U145 L-100	100	15	189	189	+30 / -20	N/A	3

Note: Please ask for different sizes







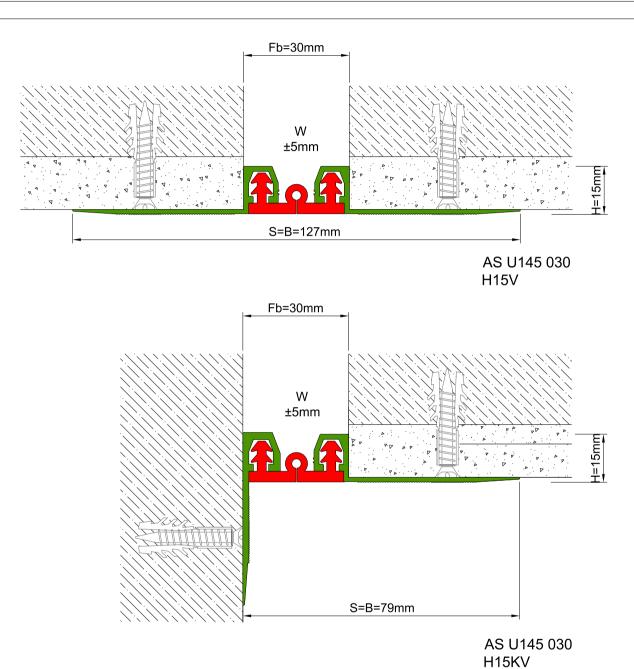

Profil No Profile Number		AS U145 030	AS U145 030K			
Fb (mm)		30	30			
H (mm)	yaklaşık approx.	15	15			
W± (mm)	yaklaşık approx.	±5	±5			
Renk		Alüminyum: Natürel, Fitiller: Siyah, gri,diğer				
Color		Aluminum: Natural,Inserts:Black,grey,others				
Malzeme		Alüminyum, EPDM Kauçuk(siyah),Termoplastik Kauçuk (gri ve diğer)				
Material		Aluminum, EPDM Rubber(black), Thermoplastic Rubber (grey and others)				
Standart Uzunluk Standard Length		3				