

AS A116 model can be considered as the flush mounted type of AS U120 & AS U121 models and can easily be installed by means of screws to all types of wall & ceiling. Ribbed elastomeric gasket gains the profile a remarkable movement ability and compensate uneven zones in the surface. Slide-in gasket system lets the profile to be used at exterior applications as well as interior areas. Profiles up to 150 mm gap are applied with single gasket while the wider ones are with double gaskets joined with a connector profile.

Application Areas : Indoor & Outdoor / Wall & Ceiling


Ideal for: Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.Material: Mill Finish Aluminum (Anodizing optional), EPDM (Only in Black Color) or TPE Gasket


Aluminum Alloy : 6063 AA-USA / EN AW 6063

Optional Supplies: Fire Barrier, Waterproof EPDM membrane





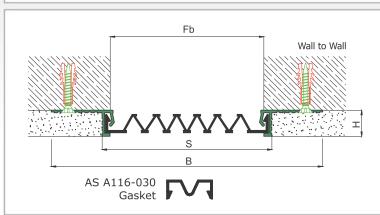



^{*} Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLORS BLACK GREY BEIGE Custom Colors available.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS A116-030	30	17	100	34	+10/-6	N/A	3
	AS A116-050	50	17	127	60	+20 / -15	N/A	3
	AS A116-080	80	17	157	90	+40 / -30	N/A	3
	AS A116-100	100	17	177	110	+20 / -50	N/A	3
	AS A116-120	120	17	197	130	+60 / -50	N/A	3
	AS A116-150	150	17	227	160	+30 / -80	N/A	3
	AS A116-200	200	17	277	210	+40 / -100	N/A	3
	AS A116-200 M	200	17	277	210	+40 / -100	N/A	3


Note: Please ask for different sizes







Duvar&Tavan Profilleri Wall&Ceiling Profiles AS A116 150 H17D

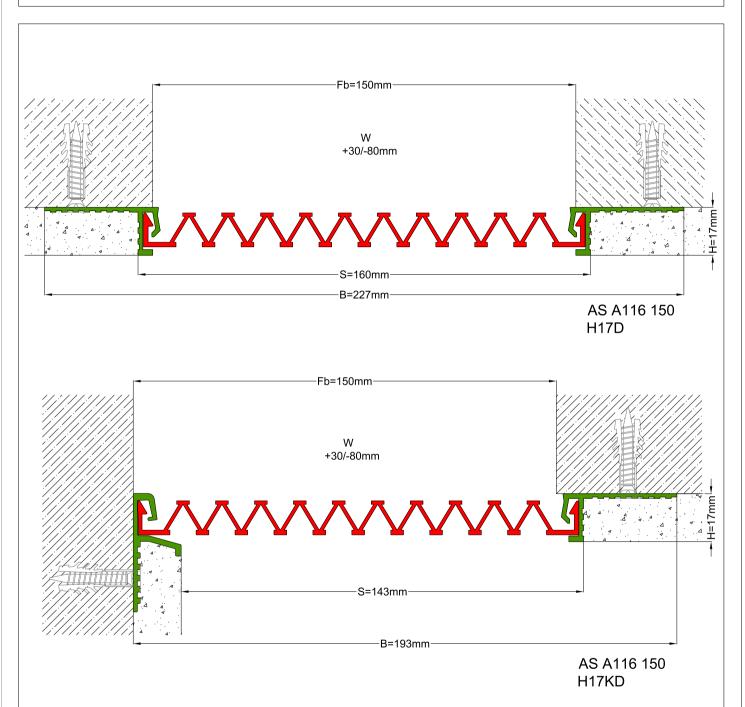

	AS A116 150	AS A116 150K		
Fb (mm)	150	150		
H (mm) yaklaşık approx.	17	17		
W± (mm) yaklaşık approx.	+30/-80	+30/-80		
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri,diğer Aluminum: Natural,Inserts:Black,grey,others			
Malzeme Material	Alüminyum, EPDM Kauçuk(siyah),Termoplastik Kauçuk (gri ve diğer) Aluminum, EPDM Rubber(black),Thermoplastic Rubber (grey and others)			
Standart Uzunluk (m) Standard Length (m)	3			