



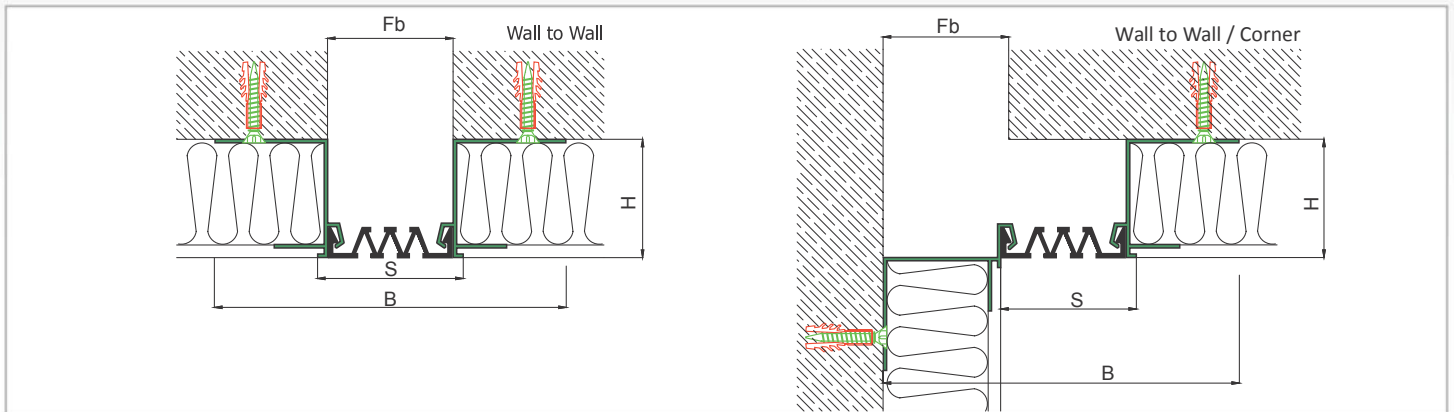

AS A124 flush mounted profile is specially designed for places with insulating board applications and can easily be installed by means of screws to all types of walls. Its ribbed elastomeric gasket gains the profile a remarkable movement ability and slide-in gasket system lets the profile to be used at facades. Profiles up to 150 mm gap are applied with single gasket while the wider ones are with double gaskets joined with a connector profile.

- Application Areas** : Outdoor / Wall
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), EPDM (Only in Black Color) or TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

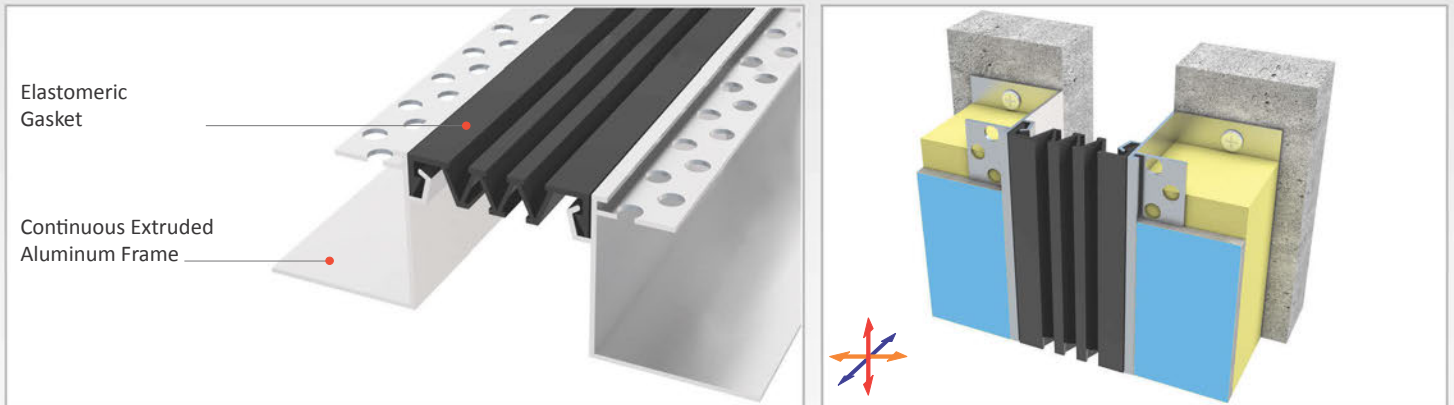



\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.



LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS A124-030	30	47 / 57	120	38	+10 / - 6	N/A	3
	AS A124-050	50	47 / 57	140	58	+20 / -15	N/A	3
	AS A124-080	80	47 / 57	170	88	+40 / -30	N/A	3
	AS A124-100	100	47 / 57	190	108	+20 / -50	N/A	3
	AS A124-150	150	47 / 57	240	158	+30 / -80	N/A	3
	AS A124-200	200	47 / 57	290	208	+40 / -100	N/A	3
	AS A124-200M	200	47 / 57	290	208	+40 / -100	N/A	3

Note: Please ask for different sizes

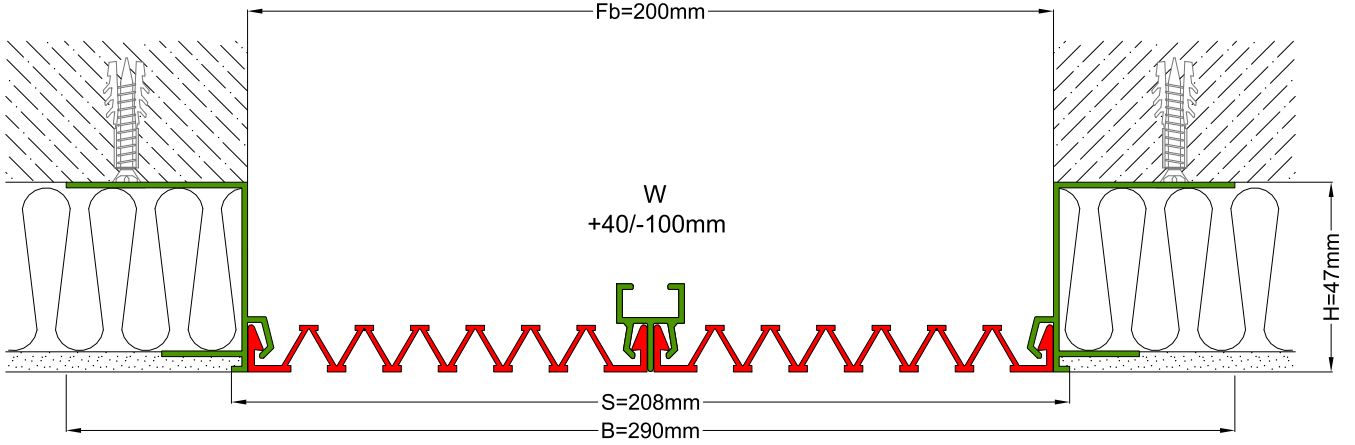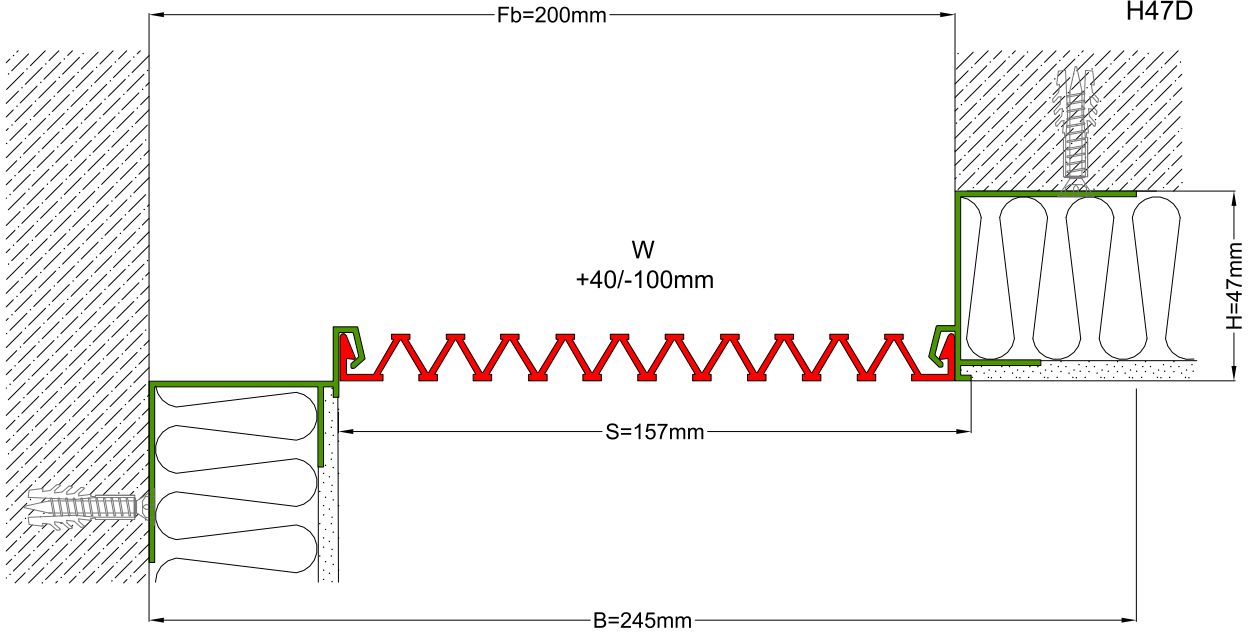


 AS A124 200  
 H47D

 AS A124 200  
 H47KD

Profil No Profile Number	AS A124 200	AS A124 200K
Açıklık (Fb) mm Gap (Fb) mm	100	100
Yükseklik (H) mm yaklaşık Coating thickness (H) mm approx	47	47
Hareket Kapasitesi (W) mm yaklaşık Movement capacity (W) mm approx	+40/-100	+40/-100
Renk Color	Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminium: Natural, Inserts: Black, grey, others	
Malzeme Material	Alüminyum, EPDM Kauçuk (siyah), Termoplastik Kauçuk (gri ve diğer) Aluminum, EPDM Rubber (black), Thermoplastic Rubber (grey and others)	
Standart Uzunluk (m) Standard Length (m)	3	