



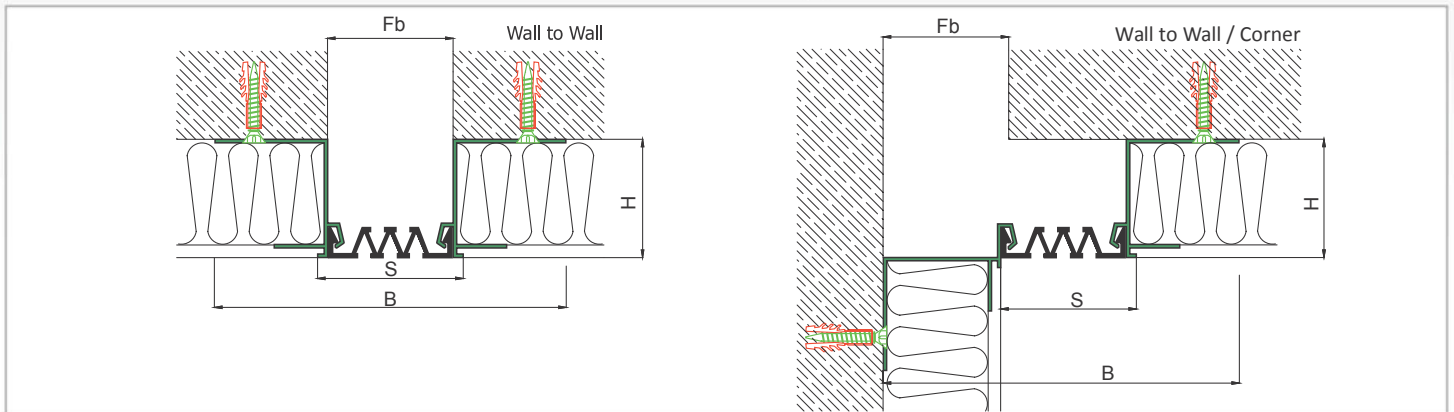

AS A124 flush mounted profile is specially designed for places with insulating board applications and can easily be installed by means of screws to all types of walls. Its ribbed elastomeric gasket gains the profile a remarkable movement ability and slide-in gasket system lets the profile to be used at facades. Profiles up to 150 mm gap are applied with single gasket while the wider ones are with double gaskets joined with a connector profile.

- Application Areas** : Outdoor / Wall
- Ideal for** : Shopping Malls, Airports, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.
- Material** : Mill Finish Aluminum (Anodizing optional), EPDM (Only in Black Color) or TPE Gasket
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

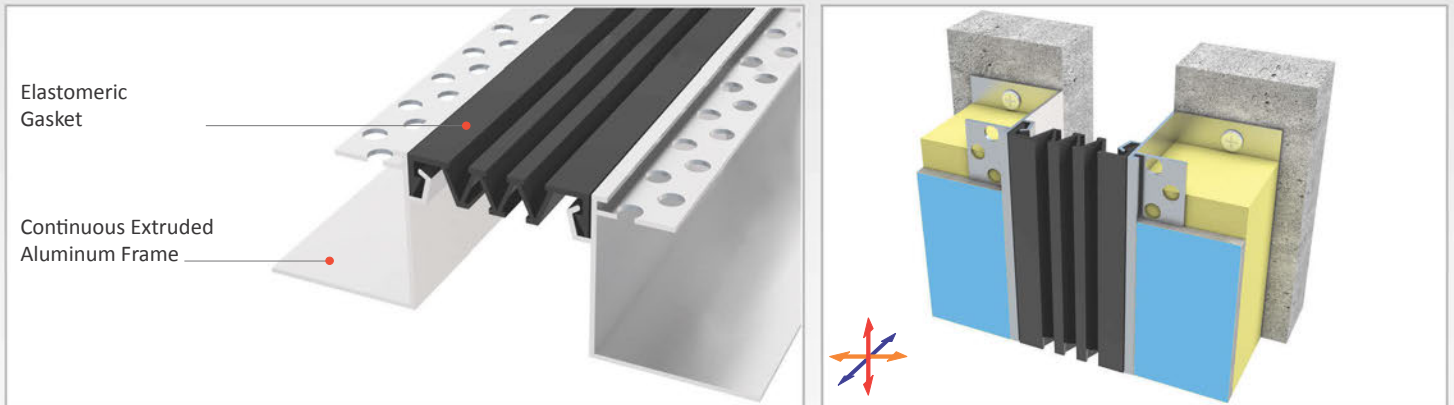



* Visuals are representative and the profile configuration may differ depending on the characteristics requested.



| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|--------------|--------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Wall to Wall | AS A124-030 | 30 | 47 / 57 | 120 | 38 | +10 / - 6 | N/A | 3 |
| | AS A124-050 | 50 | 47 / 57 | 140 | 58 | +20 / -15 | N/A | 3 |
| | AS A124-080 | 80 | 47 / 57 | 170 | 88 | +40 / -30 | N/A | 3 |
| | AS A124-100 | 100 | 47 / 57 | 190 | 108 | +20 / -50 | N/A | 3 |
| | AS A124-150 | 150 | 47 / 57 | 240 | 158 | +30 / -80 | N/A | 3 |
| | AS A124-200 | 200 | 47 / 57 | 290 | 208 | +40 / -100 | N/A | 3 |
| | AS A124-200M | 200 | 47 / 57 | 290 | 208 | +40 / -100 | N/A | 3 |

Note: Please ask for different sizes

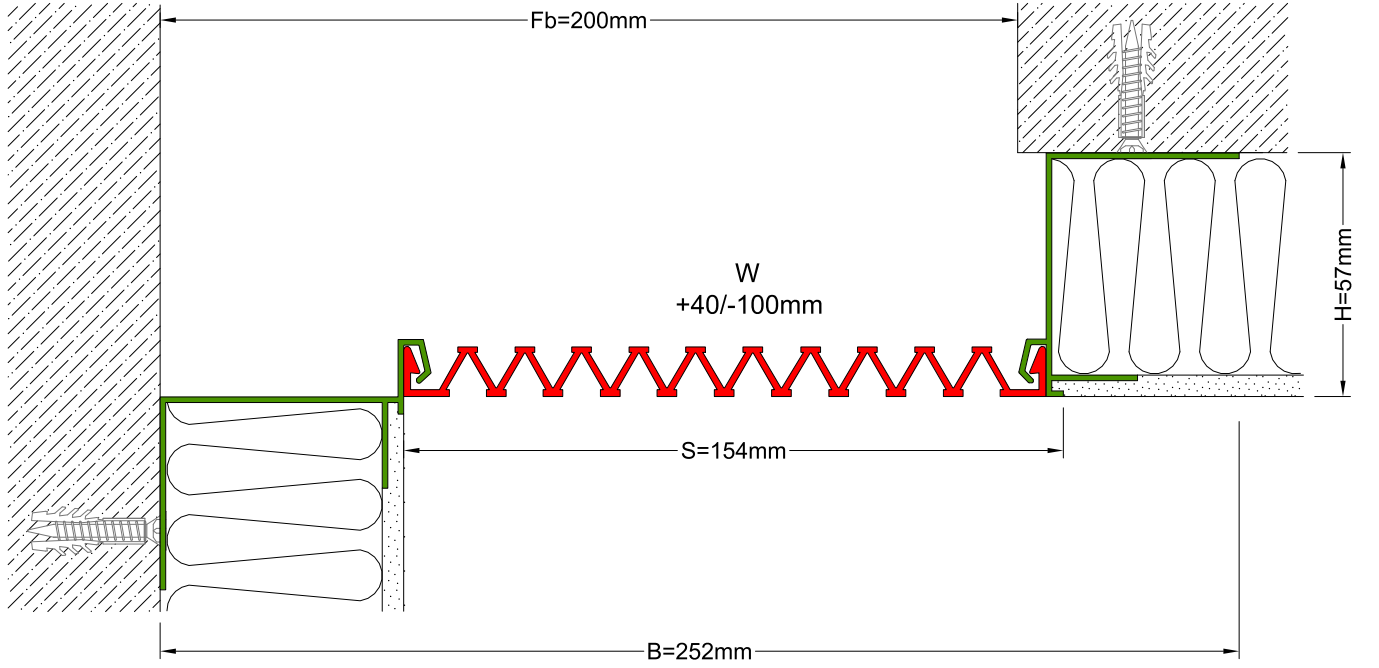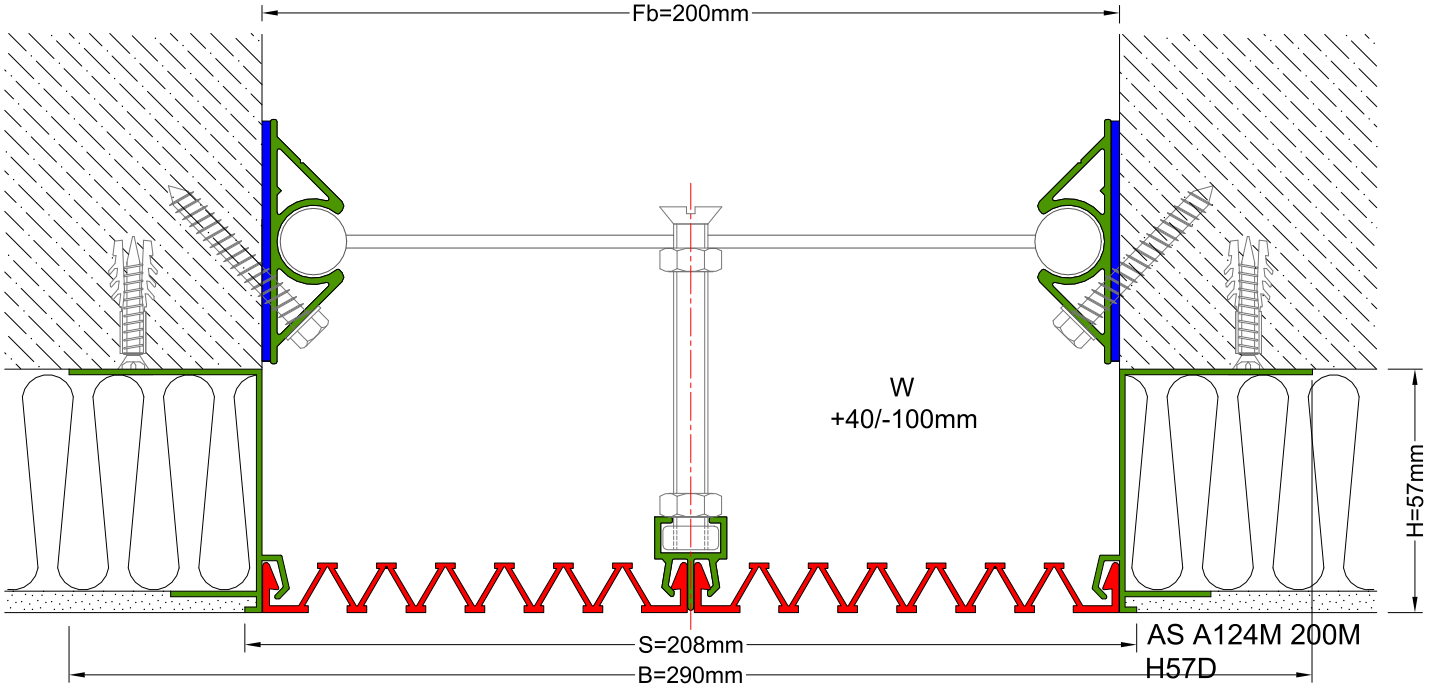


 AS A124 200
 H57KD

| Profil No Profile Number | AS A124 200M | AS A124 200K |
|---|---|--------------|
| Açıklık (Fb) mm Gap (Fb) mm | 100 | 100 |
| Yükseklik (H) mm yaklaşık Coating thickness (H) mm approx | 57 | 57 |
| Hareket Kapasitesi (W) mm yaklaşık Movement capacity (W) mm approx | +40/-100 | +40/-100 |
| Renk Color | Alüminyum: Natürel, Fitiller: Siyah, gri, diğer Aluminium: Natural, Inserts: Black, grey, others | |
| Malzeme Material | Alüminyum, EPDM Kauçuk(siyah), Termoplastik Kauçuk (gri ve diğer) Aluminum, EPDM Rubber(black), Thermoplastic Rubber (grey and others) | |
| Standart Uzunluk (m) Standard Length (m) | 3 | |