
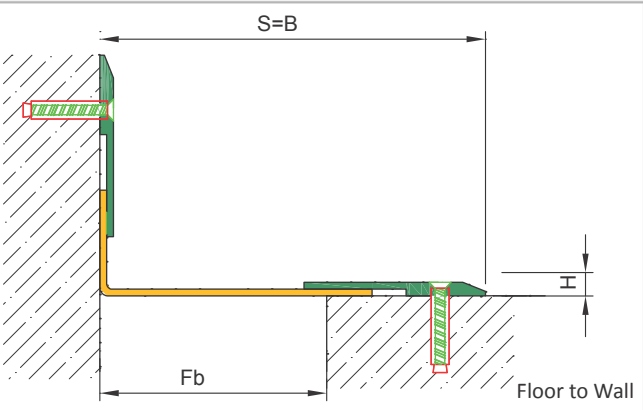
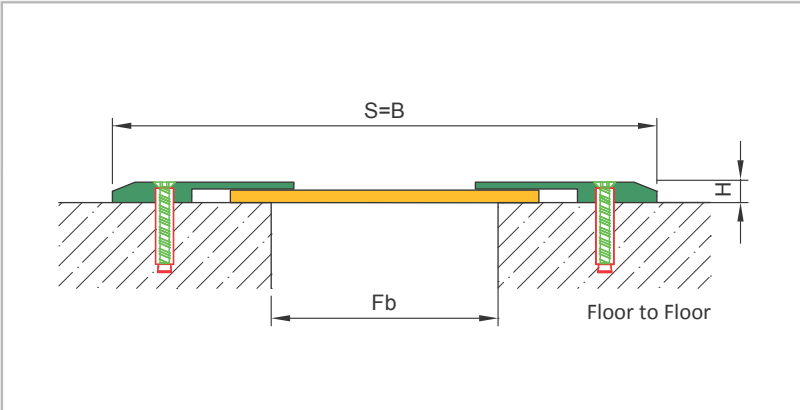


AS U202 surface mounted profile can be applied to all types of floors and load bearing capacity is designed for pedestrians. Easy installation, pure metal structure, maintenance-free and wear resistance properties make it favorable for places with heavy pedestrian traffic. Base frames of the profile are fixed on the surface and movable center plate meets horizontal and lateral shear displacements.

- Application Areas** : Indoor & Outdoor / Floor
- Ideal for** : Airports, Shopping Malls, Residences, Hospitals, Hotels, Commercial and Public Buildings etc
- Material** : Mill Finish Aluminum (Anodizing optional), ST 37 Steel, Stainless Steel
- Aluminum Alloy** : 6063 AA-USA / EN AW 6063
- Optional Supplies** : Fire Barrier, Waterproof EPDM membrane



FLOOR

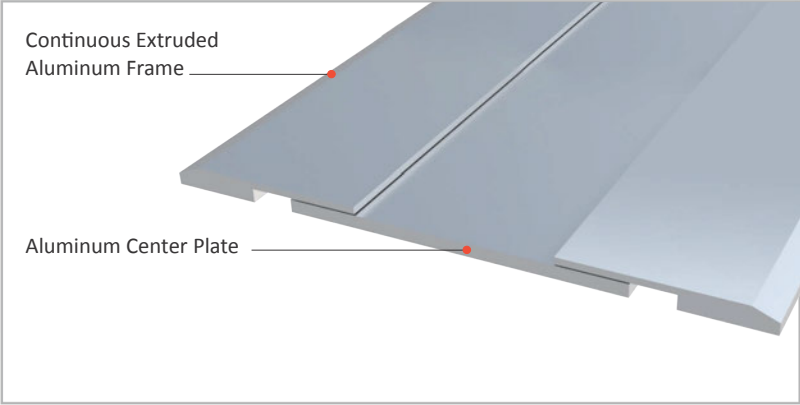


* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

| LOCATION | MODEL | GAP (Fb) mm | HEIGHT (H) MM | OVERALL WIDTH (B) mm | VISIBLE WIDTH (S) mm | MOVEMENT (W) mm | LOAD CAPACITY | STANDARD LENGTH (mt) |
|----------------|-------------|-------------|---------------|----------------------|----------------------|-----------------|---------------|----------------------|
| Floor to Floor | AS U202-050 | 50 | 6 | 190 | 190 | ±20 | | 3 |
| | AS U202-100 | 100 | 6 | 240 | 240 | ±20 | | 3 |
| | AS U202-150 | 150 | 6 | 290 | 290 | ±20 | | 3 |
| | AS U202-200 | 200 | 6 | 340 | 340 | ±20 | | 3 |

Note: Please ask for different sizes

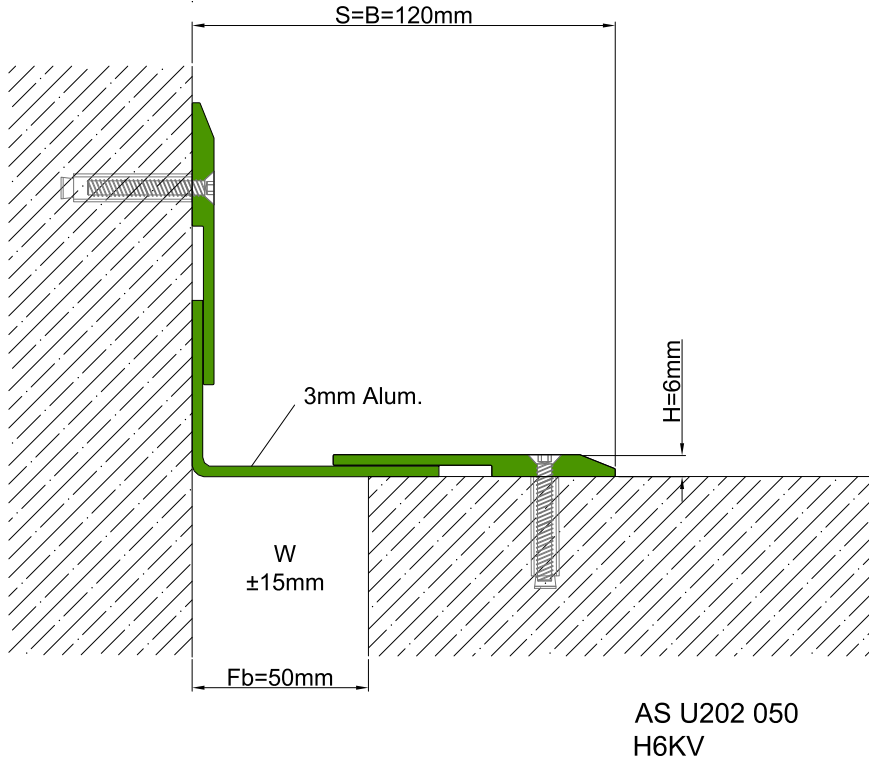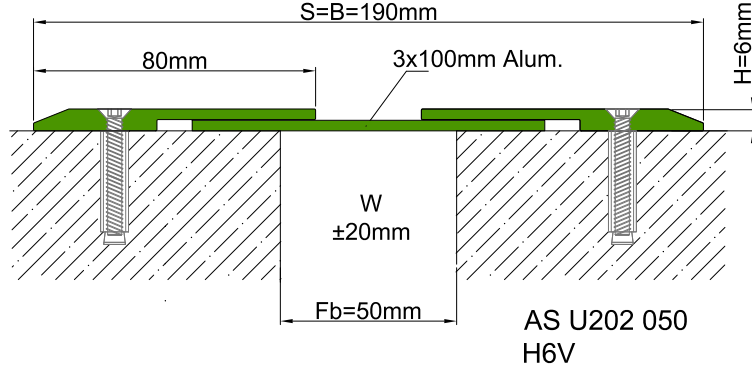

| Profil No Profile Number | AS U202 050 | AS U202 050K |
|---|---|--------------|
| Fb (mm) | 50 | 50 |
| H (mm) yaklaşık approx. | 6 | 6 |
| W± (mm) yaklaşık approx. | ±20 | ±15 |
| Renk Color | Alüminyum: Natürel Aluminum: Natural | |
| Malzeme Material | Alüminyum Aluminum | |
| Standart Uzunluk Standard Length | 3 | |
| Yükleme Kapasitesi Load-Bearing Capacity |  | |