




AS A155 profile is designed for wall & ceiling applications at indoor areas as well as exterior wall applications. It functions as a seismic profile and gives a decorative aspect with invisible screwing system. Base frames of the profile are fixed on the surface at both sides and the movable center plate meets the displacements. It can be used as surface or flush mounted. EPDM Cord placed between cover and center plates tighten the plates and eliminate metal stroking noise. For exterior applications, please inform Asteknik before placing an order.

Application Areas : Indoor & Outdoor / Wall & Ceiling


Ideal for : Airports, Shopping Malls, Residences, Hospitals, Hotels, Commercial & Public Buildings etc.


Material : Anodized Aluminum, EPDM Cord Aluminum Alloy : 6063 AA-USA / EN AW 6063

**Optional Supplies** : Fire Barrier, Waterproof EPDM membrane

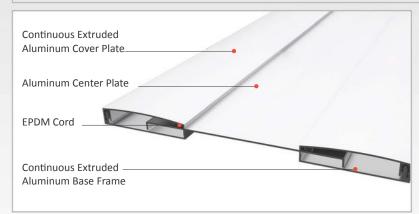



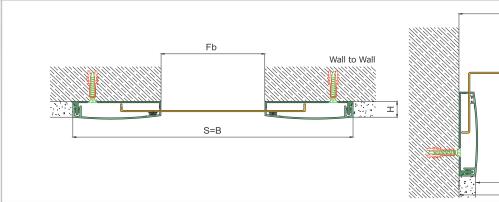



\* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Wall to Wall	AS A155L-050	50	16	220	220	+70/-50	N/A	3
	AS A155-050	50	16	220	220	+70/-50	N/A	3
	AS A155L-080	80	16	250	250	+70/-75	N/A	3
	AS A155L-100	100	16	270	270	+70/-75	N/A	3
	AS A155-100	100	16	270	270	+70/-75	N/A	3
	AS A155L-150	150	16	320	320	±35	N/A	3
	AS A155-150	150	16	320	320	+70/-75	N/A	3
	AS A155L-200	200	16	370	370	±35	N/A	3
	AS A155L-250	250	16	420	420	±35	N/A	3
	AS A155L-300	300	16	470	470	±35	N/A	3

Note: Please ask for different sizes


AS A155L series' center plates are manufactured from aluminum sheet








## Sismik Duvar&Tavan Profilleri Seismic Wall&Ceiling Profiles AS A155L 150 H16V

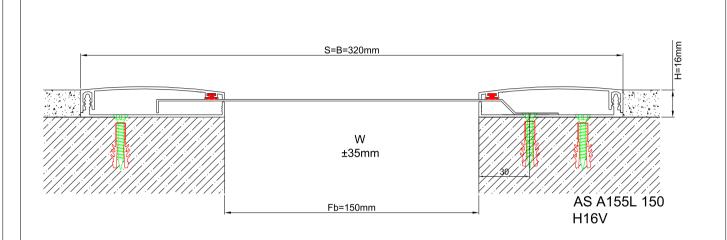

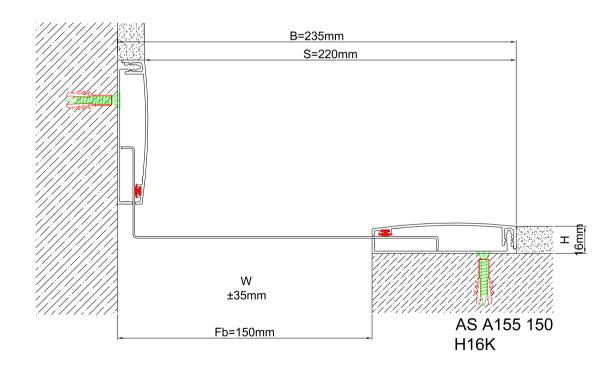

Profil No Profile Number	AS A155L 150	AS A155 150K		
Açıklık (Fb) mm Gap (Fb) mm	150	150		
Yükseklik (H) mm yaklaşık Coating thickness (H) mm approx	16	16		
Hareket Kapasitesi (W) mm yaklaşık Movement capacity (W) mm approx	±35	±35		
Renk Color	Alüminyum Orta ve Üst Kapak: Eloksallı, Alüminyum Bağlantı Elemanı: Natürel, Fitiller: Siyah Aluminum Center and Cover Plate: Anodised, Aluminum Base Frame: Natural,Inserts:Black			
Standart Uzunluk (m) Standard Length (m)	3			