



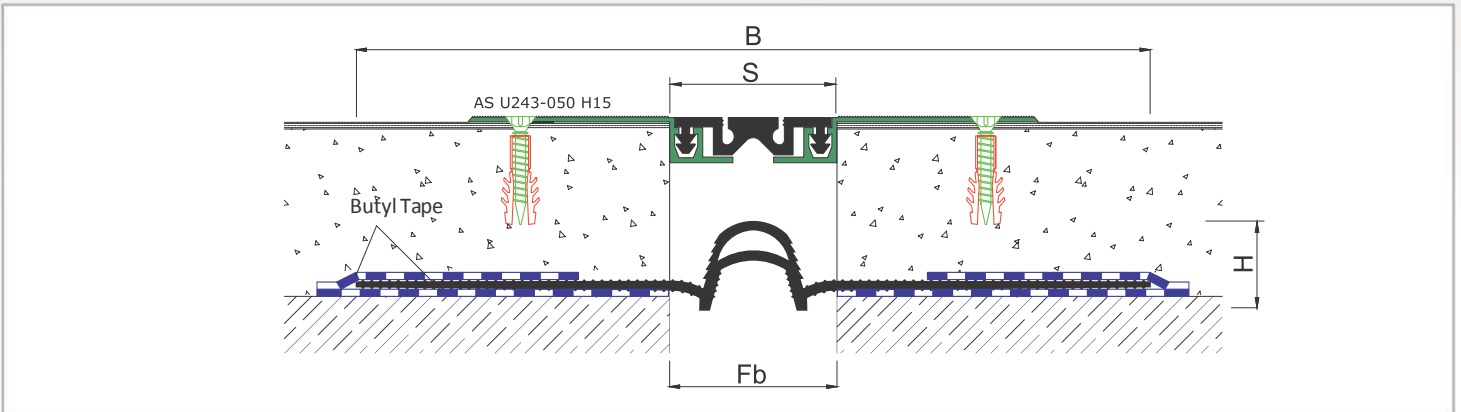

AS A291 is ideal for places with water leakage risk. At no-traffic areas it can be applied by itself but it must be covered with pebbles or similar to get protected from direct sunlight. For places with pedestrian or vehicle traffic, AS A291 must be applied underneath an expansion joint profile which must be resistant to traffic load passing over. It can easily be installed by means of butyl tape or epoxy.

Application Areas : Outdoor / Floor
Ideal for : Terraces, Flat Roofs, Car Parks etc.
Material : SBR Rubber

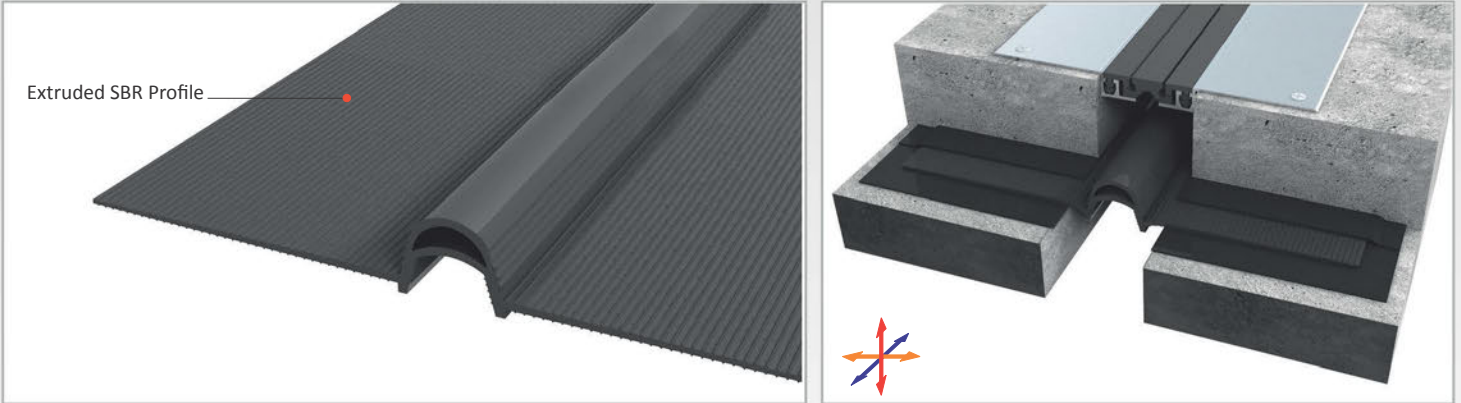


* Visuals are representative and the profile configuration may differ depending on the characteristics requested.

GASKET COLOR **BLACK**

LOCATION	MODEL	GAP (Fb) mm	HEIGHT (H) MM	OVERALL WIDTH (B) mm	VISIBLE WIDTH (S) mm	MOVEMENT (W) mm	LOAD CAPACITY	STANDARD LENGTH (mt)
Terrace	AS A291-025	25 - 50	30	270	-	+20 / -15		13
	AS A291-080	80 - 100	30	400	-	+20 / -40		13

Note: Please ask for different sizes

WATERTIGHT FLOOR

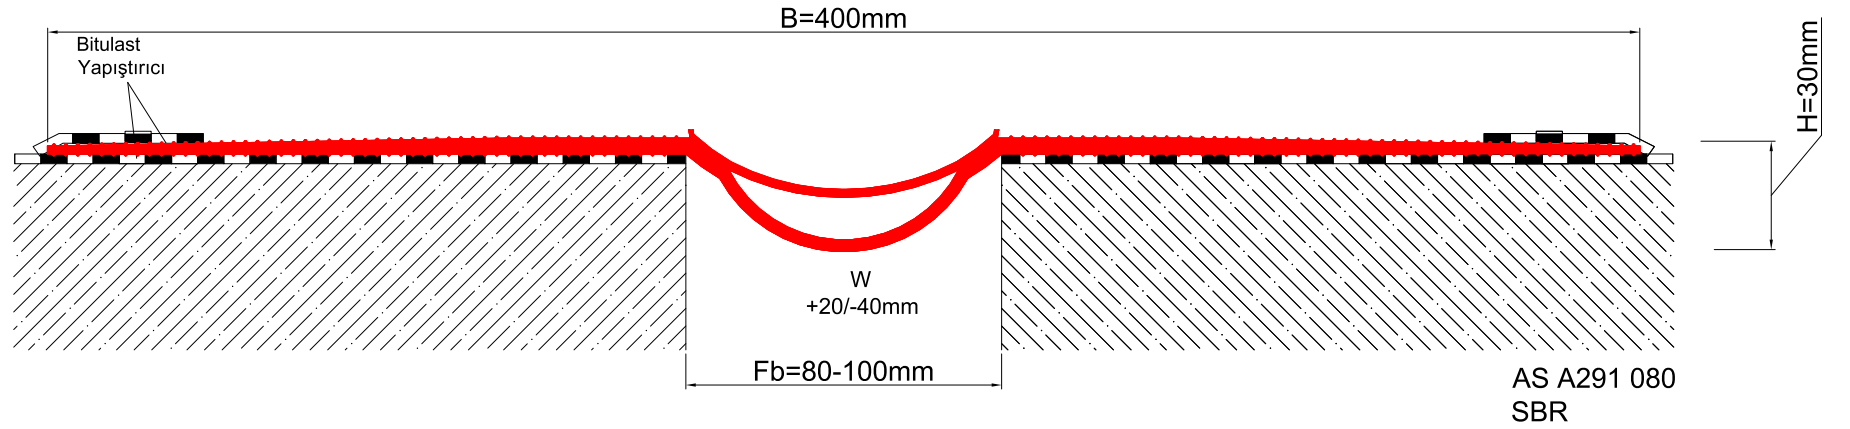

Profil No Profile Number	AS A291 080 SBR	
Fb (mm)	80-100	
H (mm)	yaklaşık approx.	30
W± (mm)	yaklaşık approx.	+20/-40
Renk Color	Siyah Black	
Malzeme Material	SBR Kauçuk SBR Rubber	
Standart Uzunluk (m) Standard Length (m)	13	
Yükleme Kapasitesi Load - Bearing Capacity		