



TAPE NO. 4420

【Waterproof and moisture proof butyl rubber adhesive tape】

《Feature》

TAPE No. 4420 is a waterproof and moisture proof adhesive tape. This tape consists of high adhesion butyl rubber adhesive and polyester non-woven fabric. It performs its characteristics in a wide range of temperature. The tightness of adhesive is excellent, so, this tape is applicable wherever moisture proof and weather resistance are required.

《Structure》

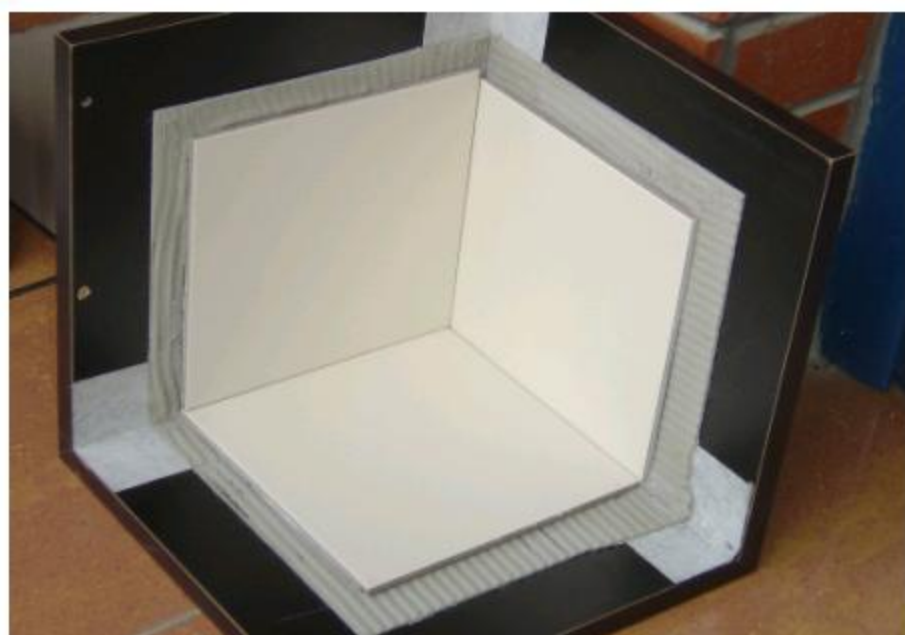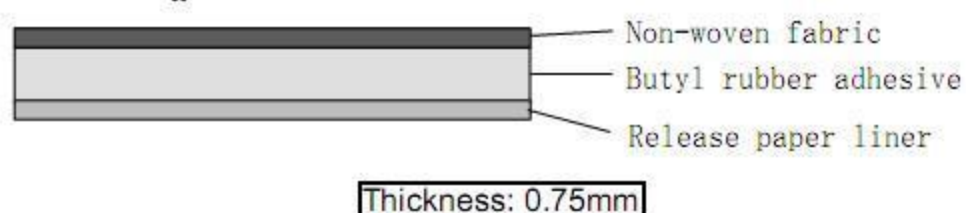

《Application》

- 1) Waterproofing of joint parts for Two by Four construction method.
- 2) Foundation of metal plating of roof, ridge board, roof-deck, etc.
- 3) Crack repairing of roof, wall, pipe, etc.

《General property》

Test item	Unit	Value
Adhesion to steel	N/10mm	7.84
	gf/25mm	2,000
Tack	Ball No.	34
Holding power(23℃)	Minutes	13
Tensile strength	N/10mm	51
	kgf/25mm	13
Elongation	%	35
Vapor penetration*	g/m ² · 24hrs	3.1

Test method: JIS Z 0237(*JIS Z 0208)

**Specification is subject to change without notice.*

**All the figures, technical information and recommendation stated above are on the basis of the tests we believe to be reliable, but the accuracy thereof is not guaranteed*

《Standard size and packing》

Width x Length	Rolls/carton
50mm x 20m	16 rolls
75mm x 20m	12 rolls
100mm x 20m	8 rolls

Note: Other sizes may be available. Please ask us when you get special requirements.

《Instruction for application》

- 1) Please remove obstacles such as dirt, dust, oil, water etc., before applying.
- 2) Please consult us when you use this tape for special applications.
- 3) Please store this tape in a dark and cool place as much as possible.